



DESIGN STATEMENT

BBQ areas provide amenity to a park by enhancing social interaction for the local community.

BBQs must be constructed from approved sturdy and corrosion-resistant materials which are easy to clean, such as stainless steel.

The BBQ at minimum must have one stainless steel top surround and one hot plate. For larger premium reserves (such as Coburg Lake) these are typically double BBQ's.

BBQs must only be electric with a push button operation on timer and not coin operated.

In preference the BBQ surround is also stainless steel, though could be masonry or composite to suit a given site. Timber surrounds or timber cladding is not acceptable.

Locks must be installed on the BBQ to Council standards.

APPLICABLE LOCATIONS

Merri-bek open space including conservation areas, parks, playspaces and reserves.

COUNCIL STANDARD DRAWING

C200.01 Park BBQ.

CROSS REFERENCE DOCUMENT

- B170.02 Park Drinking Fountain.

STANDARD SPECIFICATION

DDA compliant (to AS 1428) single or double BBQ with top surround and hot plate. Stainless steel to be LDX 2205 with no warping.

SUPPLIER

Greenplate or similar approved.

MAINTENANCE


Periodically clean BBQ unit. Test that unit is working correctly and that adjacent drinking fountain or tap is also working correctly.

GENERAL NOTES


1. Refer to manufacturer's installation specification.

C200.01 Park BBQ

- Note:**
- BBQ unit to have min. one stainless hot plate and one steel work bench. Premium reserves to typically have a double BBQ rather than single.
 - All BBQ units to be DDA compliant.
 - Install and connect to services in accordance with manufacturer's specifications. BBQ unit to be electric with a push button operation on timer.
 - In preference provide a drinking fountain within 10 metres of the BBQ. If not available, supply a tamper-proof spring loaded valve tap as shown. Conceal pipe within BBQ cavity in preference.

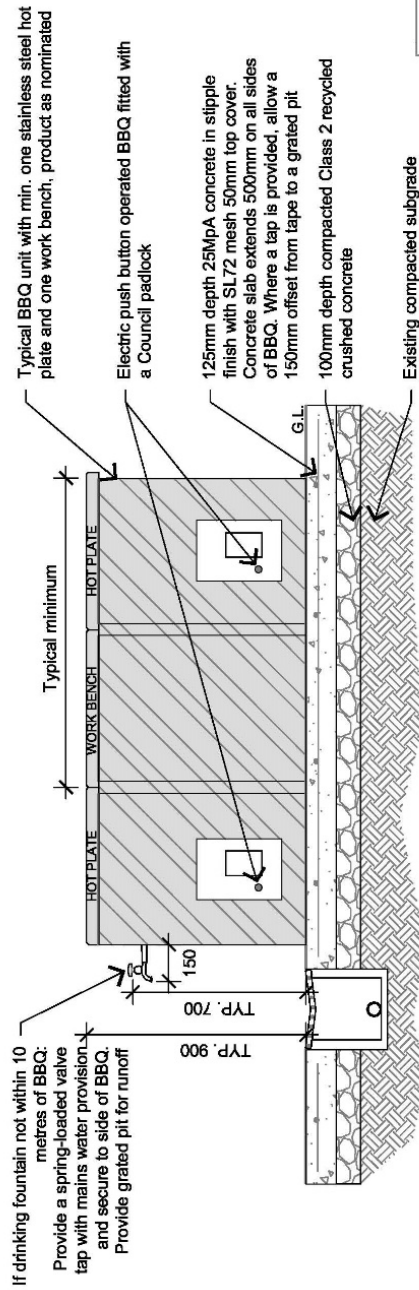

01 TYPICAL BBQ UNIT
Elevation 1:25

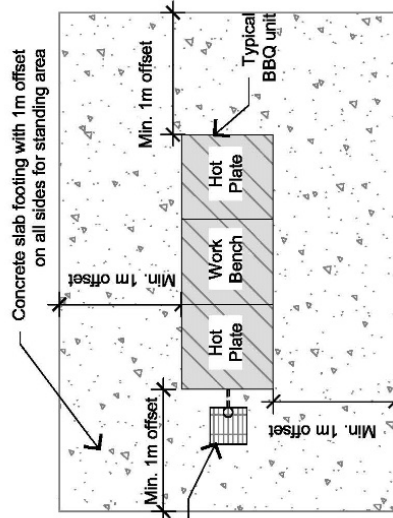

01 TYPICAL BBQ LAYOUT
Plan View 1:50

If no adjacent drinking fountain: spring-loaded tap with associated grated pit and outlet to stormwater. Ensure tap is positioned over the pit